




## Delete User Codes

To delete User Codes from the panel file, select the Delete tab.

Click on the check box next to the user code to delete, or **Select All**. When selection is complete, click **Delete**.

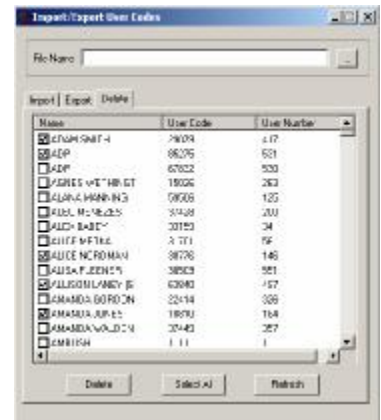


## Enhanced Zone Test

A new option has been added to System Options to enable Enhanced Zone Test operations.

**Enhanced Zone Test:** Select this option to enable Enhanced Zone Test operations. The default is unchecked.

Enhanced operation allows:

- Panic Test and Walk Test functions can be restricted to operate only during an Area 32, Shift 4 schedule if programmed.
- A Verify message is sent each time a zone is tested. If a zone is tripped multiple times, a Verify message is sent for each trip. This allows the Central Station to record the number of devices per zone.
- The Verify message for each zone test is sent at the time the trip occurs instead of at the end of Walk Test.
- The System Test Begin and System Test End Central Station messages indicate the type of zone being tested. The System Test Begin message also includes the user name and number.

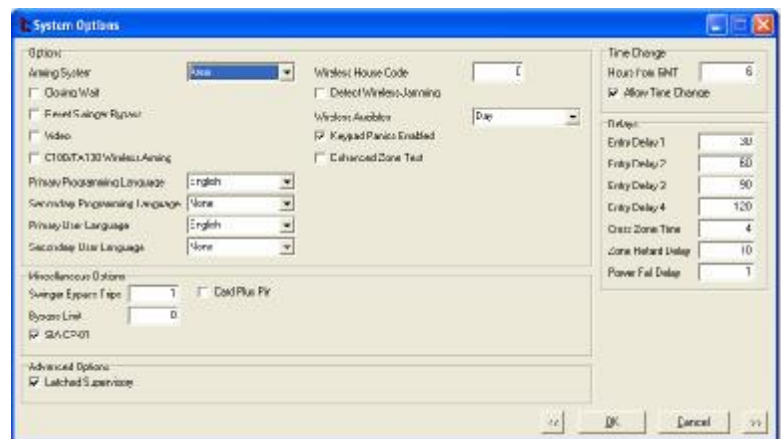

## Ordering the New Software

Remote Link and System Link updates version 1.40 are available for download free of charge on the DMP Dealer Direct Website at <http://dmp.com/dealer>. Hard copy updates on CD can be obtained at [buy.dmp.com](http://buy.dmp.com) or by calling DMP Customer Service at 1-800-641-4282.