

XTLtouch



Benefits

- ▶ Designed for fast, reliable wireless installations
- ▶ Remote panel updates via cellular or network
- ▶ Brand with your dealer logo
- ▶ Programmable User Inactivity Monitor watches for on-site activity
- ▶ Keypad turns red in alarm conditions
- ▶ View system events/ user activity through keypad display
- ▶ False alarm question allows the user to silence alarm bells and still keep the system armed
- ▶ Remote control via Virtual Keypad™ or VirtualKeypad.com

Features

- ▶ 900 MHz Two-Way™ Wireless, Z-Wave®, and Wi-Fi built on board
- ▶ 99 Wireless zones with up to 48 pre-named zones
- ▶ Supports up to eight Two-Way Wireless sirens, key fobs or outputs
- ▶ Integrated proximity reader
- ▶ Responsive resistive touchscreen
- ▶ Up to seven additional wireless keypads
- ▶ Wall mount or desk stand
- ▶ Selectable automatic arming and disarming
- ▶ Open/Close schedules with Closing Check
- ▶ Late to Open/Early to Close and Traffic Count features for retail applications
- ▶ 16-character zone, user and area names
- ▶ 5-inch, full-color display
- ▶ All/Perimeter, Home/Sleep/Away or six Areas
- ▶ 99 four-digit user codes with authority levels
- ▶ 200-event memory
- ▶ AC power and armed LED
- ▶ Door access can be added with the 1134 wireless module or a DMP keypad with built-in proximity reader and relay
- ▶ Distinct fire, burglary, zone monitor and prewarn tones
- ▶ Built-in diagnostics for ease of service
- ▶ 26-character standard keyboard
- ▶ Arm only, ambush code and temporary user code options
- ▶ Built-in standby battery

DEALER MANAGEMENT FEATURES

ONBOARD OPTIONS: CELLULAR AND WI-FI

The XTLtouch™ can be configured to use dual communication with Wi-Fi as primary and cellular as backup.

DIRECT DATA TRANSMISSION

The cellular communicators or Wi-Fi data network transmit messages directly from the panel to the monitoring center. All of the messages being sent by the control panel are received directly by a DMP monitoring center receiver. There are no network operation centers or reinterpretation of the information over the internet. This ensures faster response and eliminates concerns about signals not being properly relayed or intermediate communication links failing.

RECEIVER 1 AND 2 OPERATION

Select one or two receivers for messages regarding alarms, supervisory/trouble, opening/closing and test reports. Send all messages to both receivers, identify one receiver for alarms and the second for reports or trouble messages to alert only the proper responder.

Receiver 2 can be used for dual reporting, or it can be used exclusively as a backup receiver. If programmed this way, Receiver 2 will start receiving messages when Receiver 1 fails and will continue until Receiver 1 returns to its normal state. When failing over to Receiver 2, the panel will notify you that it had to fail over.

ONBOARD WIRELESS

The XTLtouch control panel includes a high-gain wireless receiver on board supporting the 1100 Series™ wireless devices. These 900 MHz frequency-hopping, spread-spectrum devices feature two-way communication for superior operation, supervision and battery life. Two-way communication minimizes repetitive signaling and helps to quickly identify missing transmitters.

With 99 wireless zones, the transmitter options are more than sufficient for most installs. The XTLtouch's unique wireless features include motion detectors that are configurable over the air. Also included are eight keyfob zones or eight wireless outputs including arm/alarm LED, wireless sirens and wireless relays. All of these features make the XTLtouch a perfect choice for residential or small commercial applications.

HOME/SLEEP/AWAY

For residential applications, the homeowner can press one button to select each of three separate arming options. They can select Home to arm the perimeter of the home but allow for movement within the house. Select Sleep to arm the perimeter and only specified areas inside their home, leaving sensors near bedrooms disarmed. Selecting Away fully arms all elements of the system.

ALL/PERIMETER

In business applications, system users can quickly select All to completely arm the system as they leave the facility for the day. They also have the option to select Perimeter, arming all exterior sensors at doors and windows but disarming all interior sensors so employees can move freely inside the facility.

POWERING THE PANEL

The panel is powered by a small 12-volt plug-in or USB power supply. Standby battery is included.

1100T WIRELESS TRANSLATOR

The 1100T is the industry's only wireless translator listed and approved for life safety. Plus, it makes it easy to take over DSC, Interlogix, Honeywell 5800 and 2 GIG Series systems, all without replacing existing transmitters and sensors. To accommodate the maximum number of supported sensors on the XTLtouch, one 1100T can learn in 99 zones. It communicates to a DMP panel using the panel's built-in wireless receiver. This eliminates wiring and allows you to place the translator anywhere regardless of where the control panel is. With this one device, you can upgrade customers' systems to DMP quality and remote management convenience without increasing installation costs.

FULLY SUPERVISED

You're kept fully informed of system status. The unit sends full reporting messages including zones, areas and users with all names and details included. Full supervision ensures that the cellular or network communication path is intact and functional.

265LTE-V-TOUCH AND 265LTE-A-TOUCH

If your customer prefers the Wi-Fi only module, keep in mind, you can offer the flexibility of adding LTE cellular communication later. The 265LTE-V/A-Touch comes ready for activation with SecureCom Wireless and provides a fully supervised alarm communication path over Verizon's or AT&T's LTE network.

EASYconnect TECHNOLOGY

EASYconnect enables the control panel to establish an outbound connection to SecureCom over Wi-Fi. This allows for an effortless installation of network panels without any customer router programming, providing extremely quick app connection times.

FAST PROGRAMMING

Fast Programming lets your installers power through most programming data inputs and get jobs done faster. When the panel programming defaults are acceptable for installation and only basic programming options are needed, Fast Programming allows the technician to quickly enter information without navigating all of the programming menus.

- ▶ Receiver IP
- ▶ Weather Zip Code
- ▶ System (Area, A/P or H/S/A)
- ▶ Hours from GMT
- ▶ Wireless Siren Serial Number
- ▶ Zone Information

All standard programming options are still available in the programming menu from the keypad, Dealer Admin or Remote Link.

AUTO WPS

The XTLtouch control panel provides the ability to connect to a Wi-Fi network easily with the Auto WPS feature. Once the XTLtouch is powered on, users press the WPS button on the router to connect the XTLtouch to the Wi-Fi network automatically. If Auto WPS is unavailable, the list of available Wi-Fi networks will pop up on the keypad to manually select the preferred network.

BUILT-IN PROGRAMMER

An internal English-text programmer enables technicians to easily program and test the panel from any keypad. A lockout code restricts access to only authorized persons.

REMOTE PROGRAMMING

Remotely program panels using Remote Link or Dealer Admin. Retrieve panel programming, make the necessary programming change and then send the revised programming into the panel.

END USER MANAGEMENT FEATURES

ENTRY CHECK-IN PROTECTION

With DMP's patented Entry Check-In Protection, your system still works even if the panel is destroyed. Entry Check-In Protection is a proactive safeguard against a burglar's fast tactic to disable the security system before it can send an emergency signal. Specifically, if an entry zone is triggered, and the system is not disarmed in the designated delay timeframe, a trouble signal will be immediately generated at the monitoring center.

Z-WAVE SUPPORT

Add up to 140 Z-Wave devices for mobile control of lights, locks and thermostats. Up to 20 Favorites allow users to program multiple devices to respond to a single command or panel events like arming and disarming. Z-Wave devices can be controlled with Virtual Keypad.

VIRTUALKEYPAD.COM

Users can access their security systems via internet connection on a tablet or computer. Customers log in to VirtualKeypad.com with their logins and system user codes.

VIRTUAL KEYPAD APP

This app provides users with the ability to access a number of system functions remotely via a cellular or Wi-Fi connection.

CUSTOM ACTIONS

In addition to controlling lights, locks and thermostats, users can also take advantage of up to 20 customizable actions that can be programmed into the XTLtouch. Users can select a combined sequence of actions, all based on specific Favorites, lights and locks to activate or deactivate Z-Wave devices, Favorites or outputs during specific times and days or specific zone trips.

50 SENSOR ACTIVITY ZONES

The XTLtouch greatly expands customers' remote access to their homes and businesses through their Virtual Keypad app. Customers who use the app to control their systems can receive reports from up to 50 night or exit type zones as activity occurs on their systems.

ADDITIONAL WIRELESS KEYPADS

The 9800 Series wireless keypads are fully functioning, supervised keypads that provide installation flexibility. Add up to seven additional wireless 9800 Series keypads to the XTLtouch.

FALSE ALARM FEATURES

To reduce false alarms, the False Alarm Question prompts users to validate whether an alarm has occurred after

entering their code. In a Home/Sleep/Away or All/Perimeter system, the user can manually confirm a valid burglar alarm, and an alarm is then sent to the monitoring center.

USER CODES

Program up to 99 codes. Assign a Standard or Master Authority level to scheduled and limited users to control their level of access to the system.

EVENT MEMORY

The XTLtouch logs up to 200 user and system events that can be viewed at any time with the keypad User Menu option. The Display Events feature allows users to view stored events such as openings and closings, zone events, user code changes and supervisory events.

ZONE INACTIVITY

With Zone Inactivity, you can easily monitor a person living alone. If there is no activity at the premises within the programmed number of hours, the monitoring center receives an alert. It's a valuable feature for customers looking after elderly adults.

ZONE AUDIT

The Zone Audit feature allows programming the panel to send an alert when the sensor fails to trip within the specified number of days. This feature helps identify potential sensor problems, including sensors deactivated to bypass faults or blocked sensors.

KEYPAD DISPLAY

Screen brightness, tone (frequency) and volume of keypad touches can be adjusted easily. Simply tap the desired function, then tap the plus or minus buttons to increase or decrease each of the settings.

RED KEYPAD

During an alarm state, the keypad screen turns red. This allows the user to instantly recognize an alarm condition, even if the siren has been silenced. The screen remains red until reset by the user.

ATTENTION LIST


After disarming, if an alarm on any zone or communication problem has occurred while armed, the main screen may display a yellow attention list icon at the top of the screen. When touched, the attention list displays the zone and event.

WEATHER INFORMATION

Up-to-date weather information for today and tomorrow displays on the bottom left of touchscreens that are installed with network or cellular connected panels.

CODELESS OPERATION

The built-in proximity reader operates with a variety of credentials, including cards, fobs and the DMP ProxPatch™.

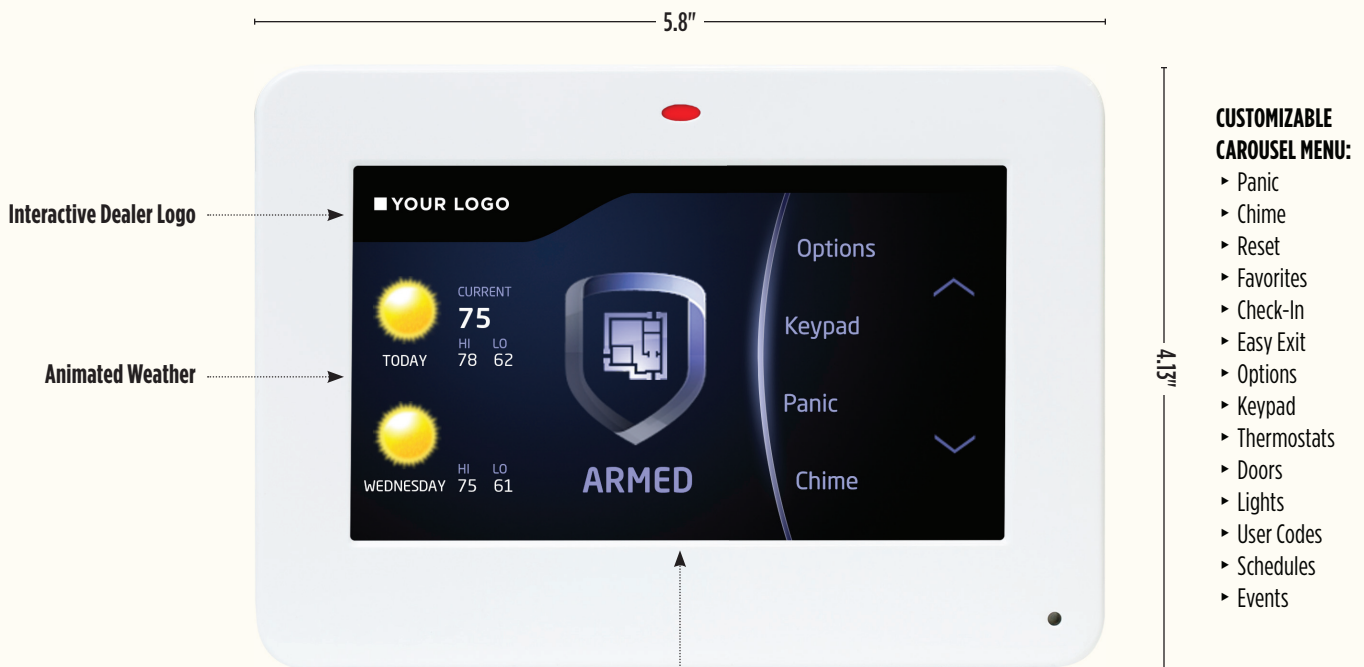

Arming: Tapping the shield displays an arming options screen.
Arming: Press the shield for two seconds, and the system quick arms and starts the exit timer, giving you plenty of time to leave.

Disarming: Press the shield for two seconds, and the keypad screen asks you to enter your code to disarm.

Enter code: When you open an entry door, the keypad screen asks you to enter your code to disarm.

XTLtouch

KEYPADS

9060-W	Wireless Keypad
9060-W/699	Wireless Keypad with Deskstand
9063-W	Wireless Keypad with Prox Reader
9063-W/699	Wireless Keypad with Prox Reader and Deskstand
9862USB-B	Wireless Graphic Touchscreen Keypad with Micro-USB
9862USB-W	Wireless Graphic Touchscreen Keypad with Micro-USB
9862-W	Wireless Graphic Touchscreen Keypad
9862-B	Wireless Graphic Touchscreen Keypad

MONITORING CENTER RECEIVERS

SCS-1R	Security Control Receiver
SCS-VR	Software Receiver

DEALER MANAGEMENT

Remote Link Programming Software
Dealer Admin

END USER MANAGEMENT

VirtualKeypad.com
Virtual Keypad



DMP WIRELESS

1100R	Repeater
1100T	Translator
1101	Universal Transmitter Internal and External Contacts
1102	Universal Transmitter External Contact
1103	Universal Transmitter Internal and External Contacts
1106	Universal Transmitter Internal and External Contacts
1107	Micro Window Transmitter
1108	Doorbell Module
1114	Four-Zone Expander
1115	Temperature Sensor and Flood Detector
1115-W/T280R	Temp Sensor/Flood Detector and Temp Sensor Probe
1115-W/470LS	Temp Sensor/Flood Detector and Water Sensor Probe
1116	Relay Output
1117	LED Annunciator
1119	Door Sounder
1122	PIR
1126R	360 Ceiling Mount PIR
1127C	Wall Mount Curtain PIR
1127W	Wall Mount Wide Angle PIR
1128	Glassbreak Detector
1132	Recessed Contact
1134	Access Control Module
1135	Siren
1136	Remote Chime
1139	Bill Trap
1141	Wall Button
1142	Two-Button Holdup Transmitter
1142BC	Two-Button Belt Clip Holdup Transmitter

1144-4	Four-Button Key Fob
1144-2	Two-Button Key Fob
1144-1	One-Button Key Fob
1144-1P	One-Button Key Fob with ProxPatch
1144-D	Dual-Button Key Fob
1148	Personal Pendant
1154	Four-Zone Input Module
1158	Eight-Zone Input Module
1164NS	Smoke Detector with No Sounder
1164	Smoke Detector with Synchronized Sounder
1166	Smoke Ring
1168	Smoke/CO/Low Temp Detector
1183-135F	Heat Detector, Fixed
1183-135R	Heat Detector, Rate of Rise
1184	Wireless Carbon Monoxide Detector

DIGITAL CELLULAR COMMUNICATOR

265LTE-V-Touch	Verizon LTE Cellular Communicator
265LTE-A-Touch	AT&T LTE Cellular Communicator

ENCRYPTED WIRELESS MODELS

1101	Universal Transmitter
1103	Commercial Universal Transmitter
1106	Universal Transmitter
1135E	Siren
1142	Two-Button Holdup Transmitter
1144-2	Two-Button Key Fob with Encryption
1144-4	Four-Button Key Fob with Encryption

Z-WAVE

Z-14319	In-Wall Toggle Switch
Z-98880-004	Door Deadbolt, Satin Nickel
Z-98880-005	Door Deadbolt, Venetian Bronze
Z-98880-006	Door Deadbolt, Polished Brass
Z-99100-STAND	Demo Deadbolt Desk Stand
Z-GD00Z	Garage Door Controller
Z-PD300EMZ5-1	Smart Light Control Module with Dimmer
Z-PS15EMZ5-1	Smart Appliance Control Module
Z-TBZ500	Thermostat

ACCESSORIES

9800-STAND-B	Deskstand for 9800 Keypads
9800-STAND-W	Deskstand for 9800 Keypads

Proximity Credentials

1306P	Prox Patch
1326	Proxcard II Card
1346	ProxKey III Access Device
1351	ProxPass
1386	IsoProx II Card
PSC-1/10	Standard Light Proximity Card, 10 Pack
PSC-1/100	Standard Light Proximity Card, 100 Pack
PSC-3/100	Proximity Key Ring Tag, 100 Pack
PSK-3/10	Proximity Key Ring Tag, 10 Pack
PSM-2P ISO/10	Imageable Proximity Card, 10 Pack

SPECIFICATIONS

Operating Voltage	12 VDC
Dimensions	5.8" W × 4.1" H × 1.3" D
Display Type	Full-color graphic LCD
Display Size	5.0" (15:9 diagonal)
Color	Gloss White
Primary Power	12 VDC (Model 372-500-W or 371-1000U-W)
Secondary Power	3.8 VDC Lion Polymer Battery
XTLtouch4800/8	Replacement 4800MAH Battery, 8 pk
XTLtouch800/8	Replacement 800MAH Battery, 8 pk

ORDERING INFO

XTLtouch-LA	XTLtouch AT&T LTE
XTLtouch-LV	XTLtouch Verizon LTE
XTLtouchF-LV	XTLtouch Verizon with Wi-Fi, Z-Wave and LTE
XTLtouchUSB-LA	XTLtouch AT&T LTE with USB
XTLtouchUSB-LV	XTLtouch Verizon LTE with USB
XTLtouch	XTLtouch with Wi-Fi

CERTIFICATIONS

FCC Wireless Receiver and Z-Wave Approvals

FCC ID: CCKPC0199
IC: 5251A-PC0199

FCC Wi-Fi Network Approvals

FCC ID: VW4-ATWINC1500
IC: 20266-WINC1500PB

FCC LTE Cellular Communicators

FCC Part 15 ID: XMR201707BG96
XMR201909BG95

Intertek (ETL) Listed

ANSI/UL 1023 Household Burglar
ANSI/UL 1610 Central Station Burglar
ANSI/UL 985 Household Fire



DMP.com | 800-641-4282
2500 N. Partnership Blvd
Springfield, MO 65803

DMP terms and conditions are located at DMP.com/Terms

© 2025 Digital Monitoring Products, Inc.

LT-1816 | 3/24/2025